




Vega

DOWNLIGHTS

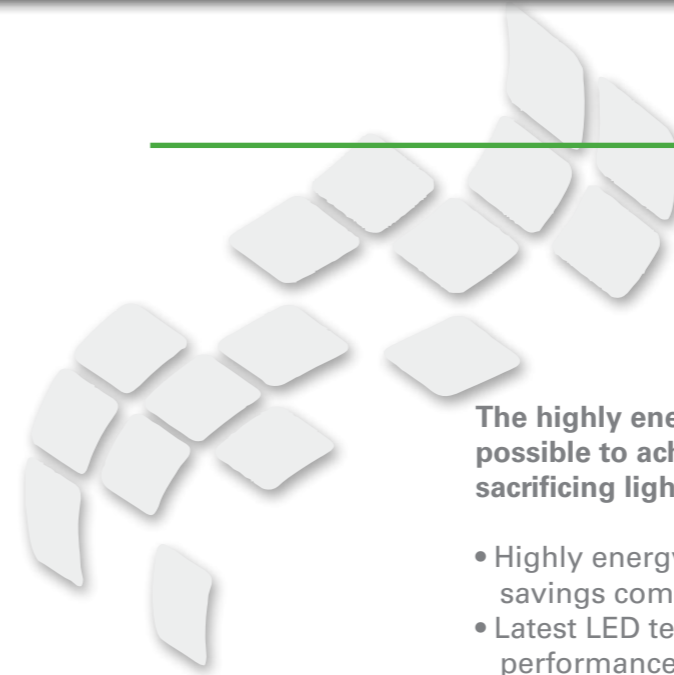

The highly energy-efficient Vega Series of downlights makes it possible to achieve extremely low power consumption without sacrificing light quality in general lighting applications.

- Highly energy-efficient, sustainable solution – up to 50% energy savings compared with traditional CFL downlights
- Latest LED technology for consistent light output, stable color performance and good color rendering (Ra > 85)
- High lumen LED package.
(Delivered lumens vary with reflector chosen.)
- Dimmable with compatible dimmers down to 10%.
- CE, UL and c-UL certification available.
- RoHS Compliant.
- True 'fit and forget' solution, with easy installation and a 50,000 hour lifetime that puts an end to the need for costly, time-consuming lamp replacement.



PRODUCT INFORMATION

Input Voltage & Frequency	85-277V AC, 50/60Hz
Max Power Consumption	20W
Light source	Cree LED
Lamp Base	E27 / GU24 / No Base
Dimmable	Yes (on suitable dimmers)
Dimensions	Ø161mm
Housing	Aluminium alloy - white/black
Optics	Optics Arcylic frosted plastic

18W LED Downlight

Product Code:

- WarmWhite **Vega-6X720W -xx**
- Natural White **Vega-6X720N-xx**
- Cool White **Vega-6X720C-xx**

SPECIFICATIONS

	Warm White	Natural White	Cool White
Color Temperature	2800K-3200K	4500K-5000K	5000k-6000K
Color Rendering Index	>92	85	85
Luminous output (Lm)	1100	1190	1210
Beam Angle	70°	70°	70°
Rated Current	700mA	700mA	700mA
Power factor	>0.95	>0.95	>0.95


IP20



APPLICATION

Hotel lighting, Shop lighting, Corridor lighting

SIZE CHART

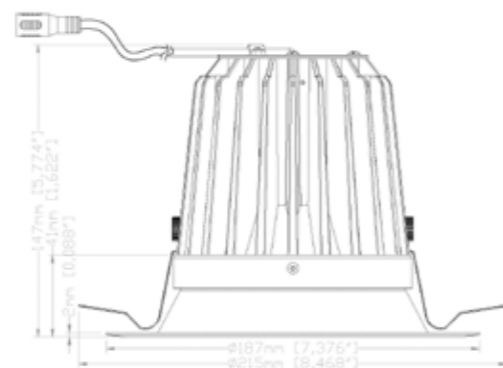

PRODUCT INFORMATION

Input Voltage & Frequency	85-277V AC, 50/60Hz
Max Power Consumption	20W
Light source	Cree LED
Lamp Base	E27 / GU24 / No Base
Dimmable	Yes (on suitable dimmers)
Dimensions	Ø161mm
Housing	Aluminium alloy - white/black
Optics	Optics Arcylic frosted plastic

18W LED Downlight

Product Code:

- WarmWhite **Vega-6X720W -xx**
- Natural White **Vega-6X720N-xx**
- Cool White **Vega-6X720C-xx**

SPECIFICATIONS

	Warm White	Natural White	Cool White
Color Temperature	2800K-3200K	4500K-5000K	5000k-6000K
Color Rendering Index	>92	85	85
Luminous output (Lm)	1100	1190	1210
Beam Angle	70°	70°	70°
Rated Current	700mA	700mA	700mA
Power factor	>0.95	>0.95	>0.95


IP20



APPLICATION

Hotel lighting, Shop lighting, Corridor lighting

SIZE CHART

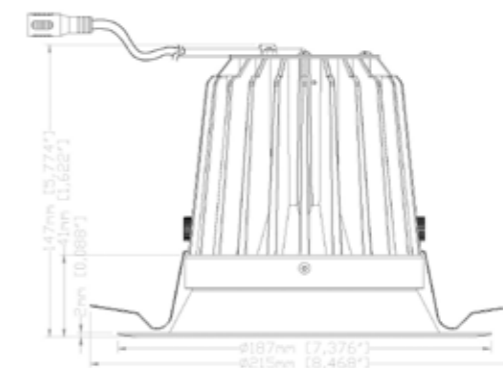



PRODUCT INFORMATION

Input Voltage & Frequency	85-277V AC, 50/60Hz
Max Power Consumption	26W
Light source	Cree 23W LED
Lamp Base	E27 / GU24 / No Base
Dimmable	Yes (on suitable dimmers)
Dimensions	Ø180mm
Housing	Aluminium alloy - white/black
Optics	Optics Arcylic frosted plastic

26W LED Downlight

Product Code:

- WarmWhite **Vega-8X726W -xx**
- Natural White **Vega-8X760N-xx**
- Cool White **Vega-8X726C-xx**

SPECIFICATIONS

	Warm White	Natural White	Cool White
Color Temperature	2800K-3200K	4500K-5000K	5000k-6000K
Color Rendering Index	>92	85	85
Luminous output (Lm)	1300	1600	1660
Beam Angle	80°	80°	80°
Rated Current	700mA	700mA	700mA
Power factor	>0.95	>0.95	>0.95


IP20



APPLICATION

Hotel lighting, Shop lighting, Corridor lighting

SIZE CHART

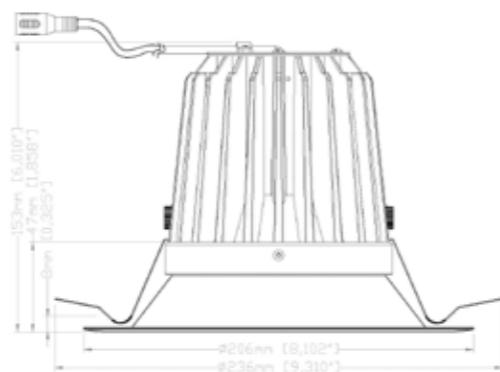

PRODUCT INFORMATION

Input Voltage & Frequency	85-277V AC, 50/60Hz
Max Power Consumption	30W
Light source	Cree 28W LED
Lamp Base	E27 / GU24 / No Base
Dimmable	Yes (on suitable dimmers)
Dimensions	Ø225mm
Housing	Aluminium alloy - white/black
Optics	Optics Arcylic frosted plastic

30W LED Downlight

Product Code:

- WarmWhite **Vega-9X730W -xx**
- Natural White **Vega-9X730N-xx**
- Cool White **Vega-9X730C-xx**

SPECIFICATIONS

	Warm White	Natural White	Cool White
Color Temperature	2800K-3200K	4500K-5000K	5000k-6000K
Color Rendering Index	>92	85	85
Luminous output (Lm)	1600	1950	2000
Beam Angle	80°	80°	80°
Rated Current	700mA	700mA	700mA
Power factor	>0.95	>0.95	>0.95


IP20



APPLICATION

Hotel lighting, Shop lighting, Corridor lighting

SIZE CHART

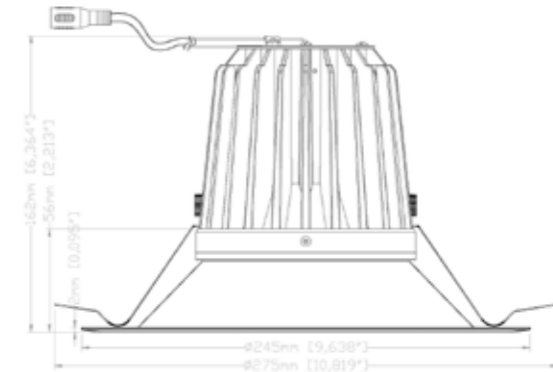



PRODUCT INFORMATION

Input Voltage & Frequency	90-260V AC, 50/60Hz
Max Power Consumption	8W
Light source	3 x Cree 3W LED
Lamp Base	E27 / E26
Dimmable	Yes (on suitable dimmers)
Dimensions	Ø86mm x 71mm
Housing	Aluminium alloy
Optics	Clear or Frosted
Lifespan	30,000 hrs

SPECIFICATIONS

	Warm White	Cool White
Color Temperature	2700-3500K	5500-6500K
Color Rendering Index	75 ~ 80	70 ~ 75
Luminous output (Lm)	405	540
Beam Angle*	25°	25°
Rated Current	615mA	615mA
Power factor	0.64	0.64


Also available in 35° and 50° variants

w

APPLICATION

Supermarket, Hotel, Bar, Meeting Rooms, Exhibition hall, etc...

SIZE CHART

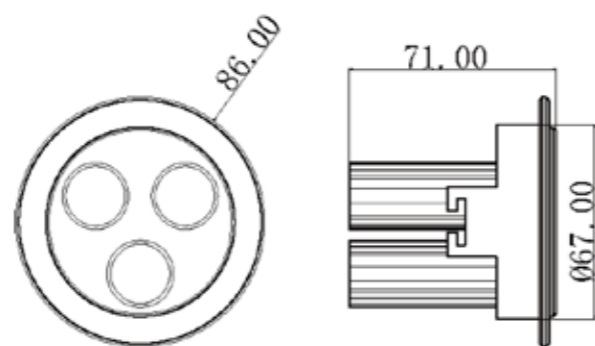

IP32



PRODUCT INFORMATION

Input Voltage & Frequency	90-260V AC, 50/60Hz
Max Power Consumption	13W
Light source	5 x Cree 3W LED
Lamp Base	E27 / E26
Dimmable	Yes (on suitable dimmers)
Dimensions	Ø94mm x 72mm
Housing	Aluminium alloy
Optics	Clear or Frosted
Lifespan	30,000 hrs

SPECIFICATIONS


	Warm White	Cool White
Color Temperature	2700-3500K	5500-6500K
Color Rendering Index	75 ~ 80	70 ~ 75
Luminous output (Lm)	675	900
Beam Angle*	25°	25°
Rated Current	615mA	615mA
Power factor	0.64	0.64

Also available in 15°, 30°, 35°, 40° and 50° variants

APPLICATION

Supermarket, Hotel, Bar, Meeting Rooms, Exhibition hall, etc...

SIZE CHART

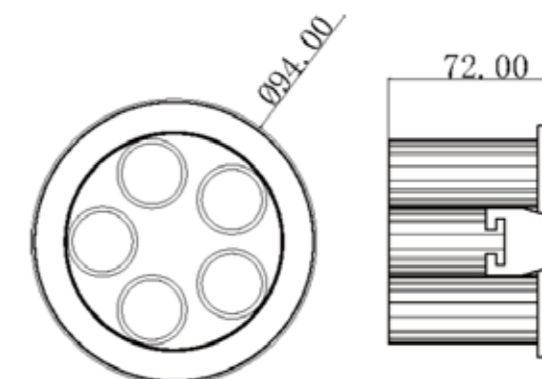

IP32





15W LED Downlight

Product Code: VegaST-15W

PRODUCT INFORMATION

Input Voltage & Frequency	90-260V AC, 50/60Hz
Max Power Consumption	15W
Light source	6 x Cree 2.5W LED
Lamp Base	E27 / E26
Dimmable	Yes (on suitable dimmers)
Dimensions	Ø113mm x 75mm
Housing	Aluminium alloy
Optics	Clear or Frosted
Lifespan	30,000 hrs

SPECIFICATIONS

	Warm White	Cool White
Color Temperature	2700-3500K	5500-6500K
Color Rendering Index	75 ~ 80	70 ~ 75
Luminous output (Lm)	810	1080
Beam Angle*	25°	25°
Rated Current	615mA	615mA
Power factor	0.647	0.647



Also available in 15°, 30°, 35° and 50° variants

w

APPLICATION

Supermarket, Hotel, Bar, Meeting Rooms, Exhibition hall, etc...

SIZE CHART

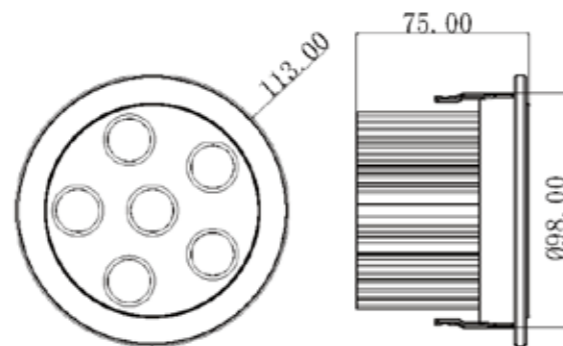

18W LED Downlight

Product Code: VegaST-18W


PRODUCT INFORMATION

Input Voltage & Frequency	90-260V AC, 50/60Hz
Max Power Consumption	18W
Light source	7 x Cree 2.5W LED
Lamp Base	E27 / E26
Dimmable	Yes (on suitable dimmers)
Dimensions	Ø114mm x 62.1mm
Housing	Aluminium alloy
Optics	Clear or Frosted
Lifespan	30,000 hrs

SPECIFICATIONS

	Warm White	Cool White
Color Temperature	2700-3500K	5500-6500K
Color Rendering Index	75 ~ 80	70 ~ 75
Luminous output (Lm)	945	1260
Beam Angle*	25°	25°
Rated Current	608mA	608mA
Power factor	0.661	0.661


Also available in 15°, 30°, 35°, 40° and 50° variants



APPLICATION

Supermarket, Hotel, Bar, Meeting Rooms, Exhibition hall, etc...

SIZE CHART

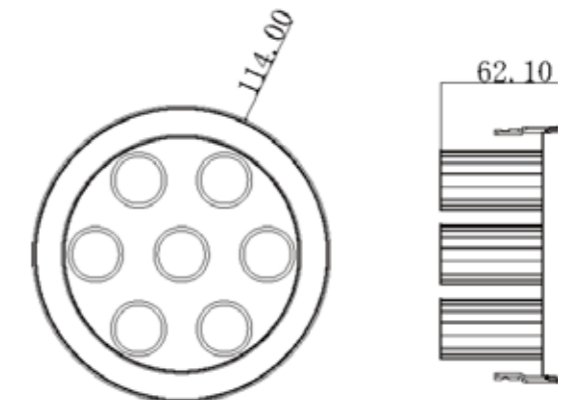


PRODUCT INFORMATION

Input Voltage & Frequency	90-260V AC, 50/60Hz
Max Power Consumption	23W
Light source	9 x Cree 2.5W LED
Lamp Base	E27 / E26
Dimmable	Yes (on suitable dimmers)
Dimensions	Ø130mm x 75mm
Housing	Aluminium alloy
Optics	Clear or Frosted
Lifespan	30,000 hrs

23W LED Downlight
Product Code: VegaST-23W
SPECIFICATIONS

	Warm White	Cool White
Color Temperature	2700-3500K	5500-6500K
Color Rendering Index	75 ~ 80	70 ~ 75
Luminous output (Lm)	1215	1620
Beam Angle*	25°	25°
Power factor	-	-

Also available in 35° and 50° variants
w
APPLICATION

Supermarket, Hotel, Bar, Meeting Rooms, Exhibition hall, etc...

SIZE CHART

IP32


PRODUCT INFORMATION

Input Voltage & Frequency	90-260V AC, 50/60Hz
Max Power Consumption	30W
Light source	12 x Cree 2.5W LED
Lamp Base	E27 / E26
Dimmable	Yes (on suitable dimmers)
Dimensions	Ø160mm x 75mm
Housing	Aluminium alloy
Optics	Clear or Frosted
Lifespan	30,000 hrs

30W LED Downlight
Product Code: VegaST-30W
SPECIFICATIONS

	Warm White	Cool White
Color Temperature	2700-3500K	5500-6500K
Color Rendering Index	75 ~ 80	70 ~ 75
Luminous output (Lm)	1620	2160
Beam Angle*	35°	35°
Power factor	0.898	0.898

Also available in 50° and 120° variants

IP32


APPLICATION

Supermarket, Hotel, Bar, Meeting Rooms, Exhibition hall, etc...

SIZE CHART